

1: GLAZING MATERIAL

- TEMPERED INNER OUTER
- LAMINATED
- TEMPERED & LAMINATED
- OVERALL GLASS THICKNESS 3/4" 1"
- OTHER _____

- TWIN WALL POLYCARBONATE 6MM
- 8MM
- 10MM
- 16MM

2: GLAZING COLOR


- CLEAR
- BRONZE N/A
- WHITE
- OTHER _____
- TWIN WALL CLEAR
- OR BRONZE
- TRIPLE WALL WHITE

3: FRAME FINISH

- MILL
- BRONZE ANODIZED
- CLEAR ANODIZED
- CUSTOM COLOR _____

FOR SELF FLASHING SKYLIGHTS PROVIDE
ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

- QTY: R.O. = X

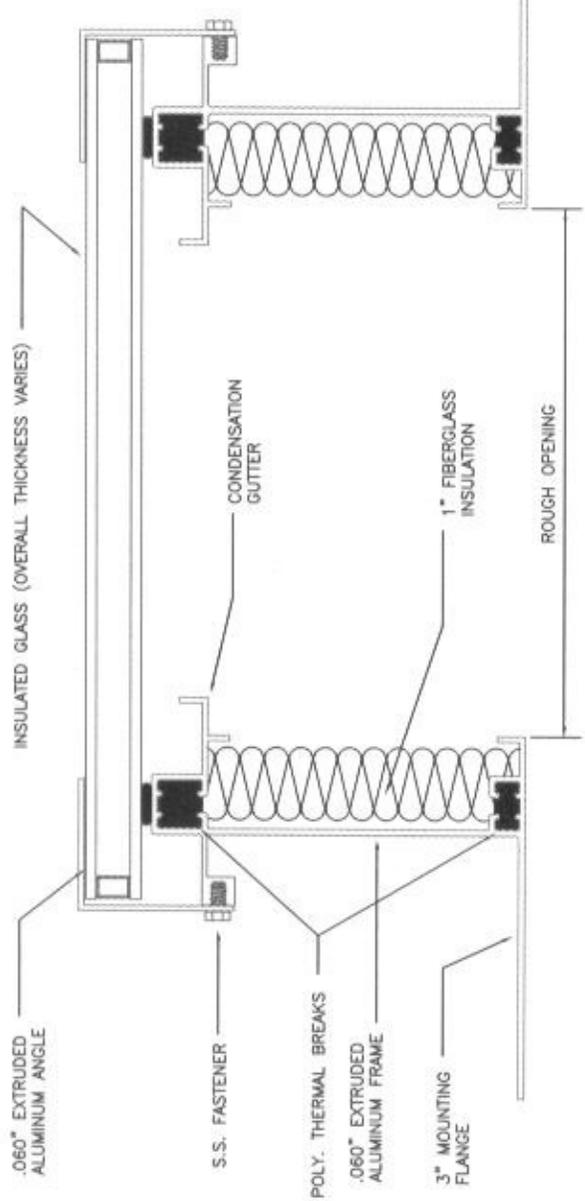

GLASS THERMALLY BROKEN & INSULATED FIXED SELF FLASHING

MINIMUM 3/12 PITCH REQUIRED



AMERICAN SKYLITES
525 113th STREET ARLINGTON, TEXAS 76011
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS		
TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330	POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	80.0 PSF MIN 40.0 PSF MIN