

1: GLAZING MATERIAL

TEMPERED INNER OUTER
 LAMINATED
 TEMPERED & LAMINATED
 OVERALL GLASS THICKNESS 3/4"
 1"
 OTHER _____

TWIN WALL POLYCARBONATE 6MM
 8MM
 10MM
 16MM
 TRIPLE WALL POLYCARBONATE

2: GLAZING COLOR

CLEAR
 BRONZE
 WHITE N/A
 OTHER


TWIN WALL CLEAR
 OR BRONZE
 TRIPLE WALL WHITE

3: FRAME FINISH

MILL
 BRONZE ANODIZED
 CLEAR ANODIZED
 CUSTOM COLOR _____

FOR CURB MOUNT SKYLIGHTS PROVIDE
 OUTSIDE DIMENSION OF FINISHED CURB

QTY: O.D. CURB= X
 QTY: O.D. CURB= X
 QTY: O.D. CURB= X
 QTY: O.D. CURB= X
 QTY: O.D. CURB= X

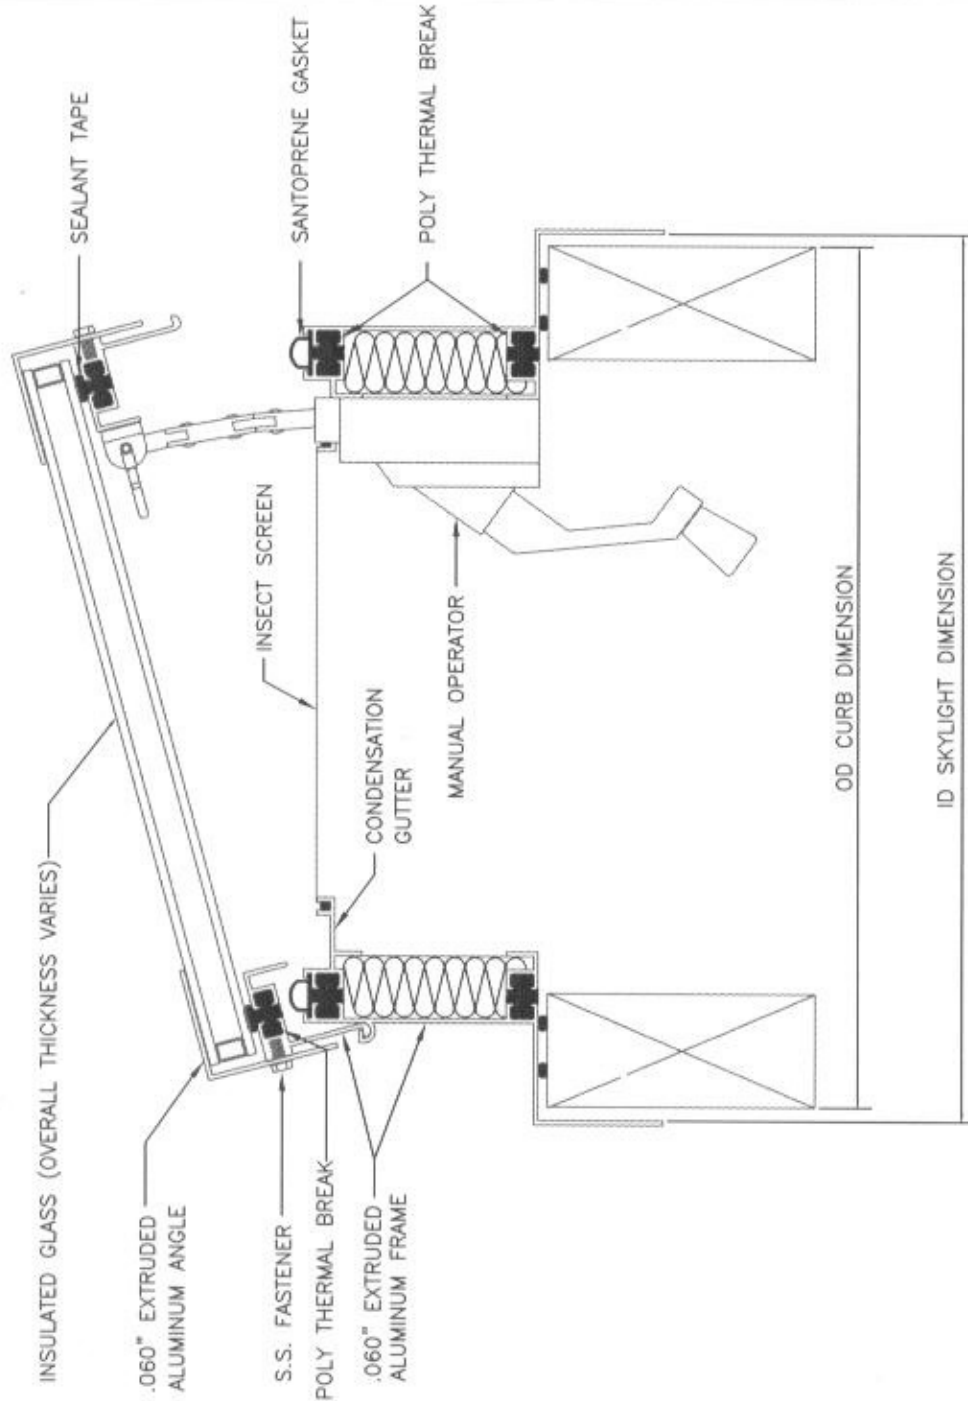

GLASS THERMALLY BROKEN & INSULATED VENTING CURB MOUNT

MINIMUM 3/12 PITCH REQUIRED



AMERICAN SKYLITES

525 113th STREET ARLINGTON, TEXAS 76011
 Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS

TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330	POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	60.0 PSF MIN 40.0 PSF MIN