

1: GLAZING MATERIAL

INNER OUTER

- TEMPERED
- LAMINATED
- TEMPERED & LAMINATED
- OVERALL GLASS THICKNESS 3/4"
- 1"
- OTHER \_\_\_\_\_

- TWIN WALL POLYCARBONATE 6MM
- 8MM
- 10MM
- 16MM
- TRIPLE WALL POLYCARBONATE

2: GLAZING COLOR

- CLEAR
- BRONZE
- WHITE
- OTHER \_\_\_\_\_


- TWIN WALL CLEAR
- OR BRONZE
- TRIPLE WALL WHITE

3: FRAME FINISH

- MILL
- BRONZE ANODIZED
- CLEAR ANODIZED
- CUSTOM COLOR \_\_\_\_\_

FOR SELF FLASHING SKYLIGHTS PROVIDE  
ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

- QTY: R.O.= X
- QTY: R.O.= X
- QTY: R.O.= X
- QTY: R.O.= X
- QTY: R.O.= X

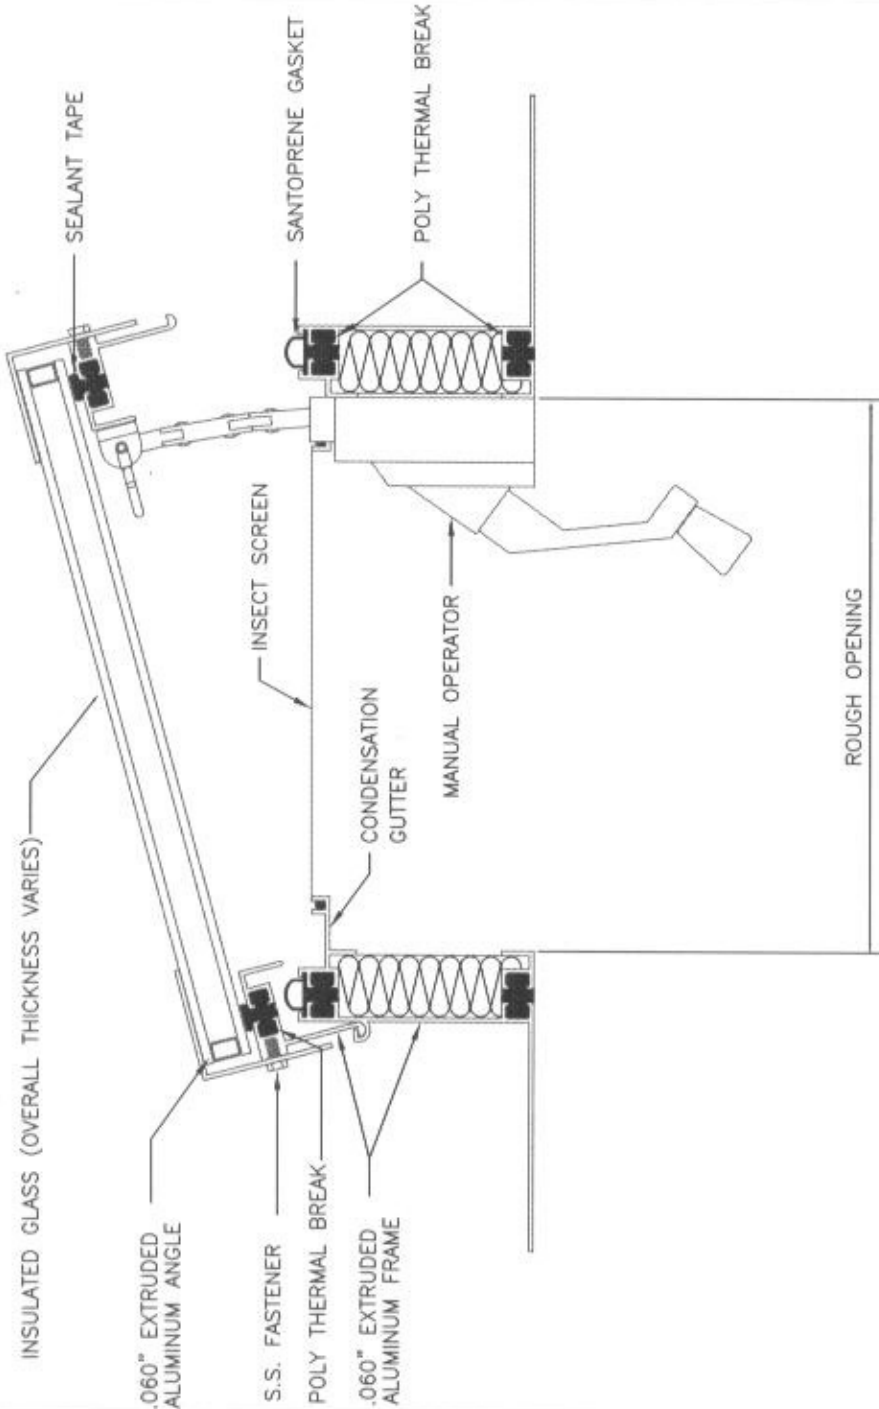

GLASS THERMALLY BROKEN & INSULATED VENTING SELF FLASHING

\*MINIMUM 3/12 PITCH REQUIRED\*



**AMERICAN SKYLITES**  
525 113th STREET ARLINGTON, TEXAS 76011  
Phone 800.772.7401 Fax 800.445.7282

TEST METHOD		SPECIFICATIONS	
TEST METHOD		TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283		6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331		TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330		POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	60.0 PSF MIN 40.0 PSF MIN