

1: GLAZING MATERIAL

ACRYLIC DOME
POLYCARBONATE DOME
TWIN WALL POLYCARBONATE
TRIPLE WALL POLYCARBONATE

INNER OUTER
☐ ☐
☐ ☐
6MM ☐
8MM ☐
10MM ☐
16MM ☐

2: GLAZING COLOR

CLEAR ☐
BRONZE ☐
WHITE ☐
OTHER ☐

TWIN WALL CLEAR
OR BRONZE
TRIPLE WALL WHITE

3: FRAME FINISH


MILL ☐
BRONZE ANODIZED ☐
CLEAR ANODIZED ☐
CUSTOM COLOR ☐

4: PYRAMID PITCH (OPTIONAL)

22 DEGREE (1/2 WIDTH X .414) ☐
30 DEGREE (1/2 WIDTH X .577) ☐
40 DEGREE (1/2 WIDTH X .839) ☐

FOR CURB MOUNT SKYLIGHTS PROVIDE
OUTSIDE DIMENSION OF FINISHED CURB

QTY: O.D. CURB= X
QTY: O.D. CURB= X
QTY: O.D. CURB= X
QTY: O.D. CURB= X
QTY: O.D. CURB= X

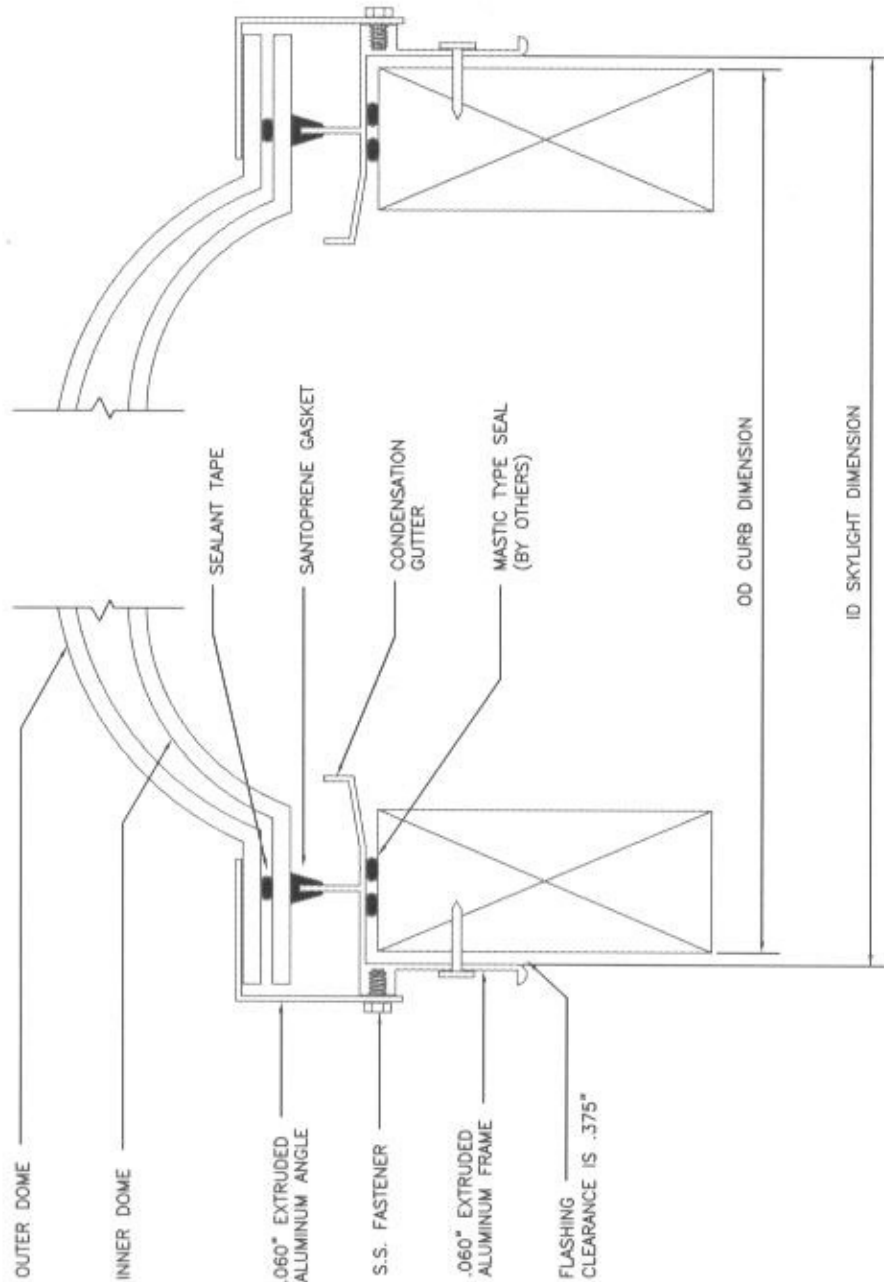

CURB MOUNT



AMERICAN SKYLITES
525 113th STREET ARLINGTON, TEXAS 76011
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS

TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330	POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	60.0 PSF MIN 40.0 PSF MIN